


Save 50% on Computers | Save 70% on Maintenance | Save 90% on Electricity

Model No. THINPC THIN CLIENT (THINPC-02)

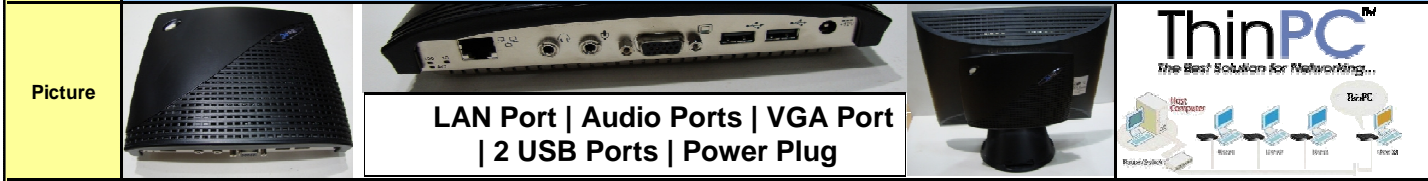


Product Details
 The ThinPC-02 is a simple terminal for those who need a completely centralized desktop management option. Because the ThinPC-02 is a completely stateless device, all of the terminal's settings are saved on the server, allowing for more control over the desktop experience. The display-based operating system provides optimized Citrix ICA and Microsoft RDP performance, and with all terminal management performed at the server (using existing database programs), it is the most easily managed thin client. **It can be mounted behind the TFT Screen.**

Hardware	Modular Terminal	Integrated Citrix ICA and RDP protocols standard with 32MB RAM
	Firmware Features	ICA and RDP, NFuse Lite Client resident
	Connection to Server OS	Citrix WinFrame, WinFrame, and Presentation Server Microsoft Windows NT 4.0 – Terminal Server Edition Microsoft Windows Server 2000, 2003, XP, and Vista
	Protocol Support	Point-to-Point Protocol (PPP) Windows 2000 RAS support Wi-Fi 802.11b USB Multiple master browser support on ICA Supports Citrix load balancing on ICA DHCP support for automatic firmware upgrades and unit configuration Network printing via LPD PPPoE to connect to WAN via DSL Simple Network Time Protocol (SNTP) TCP/IP, DNS VNC server
	Management	Remote management, configuration, and upgrades through software Wake terminal remotely
	Microprocessor	AMD Geode GX, because the Blazer software is so highly optimized, the microprocessor runs at a cool energy saving frequency of 233MHz
	Input/Output Peripheral Support	Keyboard; Mouse; VGA-type video output (DB-15); Two USB ports: one port dedicated for keyboard & mouse using USB to PS/2 Converter, one port available for peripherals (Pen Drives, Printers & Bar Code scanners)
	Networking	TCP/IP with DNS and DHCP 10/100Base-T Fast Ethernet, twisted pair (RJ-45) Wake-on-LAN ready
	Display Support	VESA monitor support, with DDC for automatic setting of resolution and refresh rate Flicker-free, 85 Hz non-interlaced refresh rate ELO Touchscreen with USB
	Display Resolution	1280x1024 @ 85Hz 8-bit, 256 colors; 1280x1024 @ 85Hz 16-bit, 64K colors
	Audio	Output: 1/8-inch mini, full 16-bit stereo, 48 KHz sample rate Input: 1/8-inch 8-bit mini microphone
	Dimension(HxWxD)	Height: 1.70 inches (430mm) Width: 7.64 inches (57mm) Depth: 6.18 inches (157mm)

Benefits

- # Low Total Cost of Ownership
- # Save Space: it can be mounted behind the TFT/LCD
- # Save power: Consume only 5W to 20W. Uses a fraction of the electricity of a PC
- # No mechanical parts: Maintenance Free 0% Failure
- # Future proof: No upgradation required
- # Security & Uniformity of Data
- # Centralize your data & management of softwares, Monitor your users
- # Environmentally friendly "Go Green"
- # Dramatically reduces acquisition & support costs
- # Easy to set up, maintain and secure
- # Connects to host PC via Ethernet (LAN)
- # Supports Windows and Linux
- # Compact, reliable & energy-efficient (no moving parts)
- # Web-quality multimedia & Local Printer support
- # Requires LESS IT staff/time
- # Remote Setup & Administration
- # Backup at the server
- # Application deployment overnight & centralized

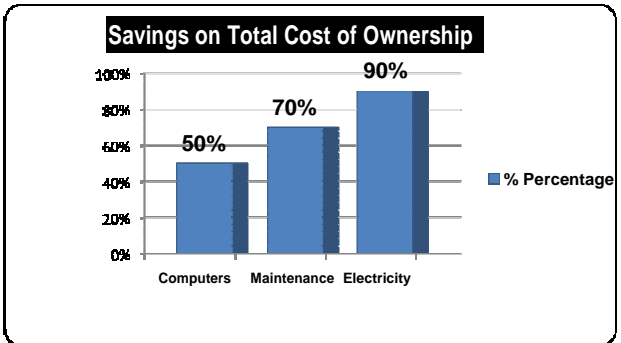

PRICE Rs. 7,000.00

Terms : (Taxes : 5% Vat Extra | Warranty : 3 Years Carry-IN | Delivery : Charges Extra as applicable | Payment : 100% Advance)

STECH INFOSYSTEM : 91-033-30240108 EMAIL: info@stechinfo.com WEBSITE : www.stechinfo.com